


FIND IT! WITH

SENSIT[®] RLD-2

REFRIGERANT GAS LEAK DETECTOR

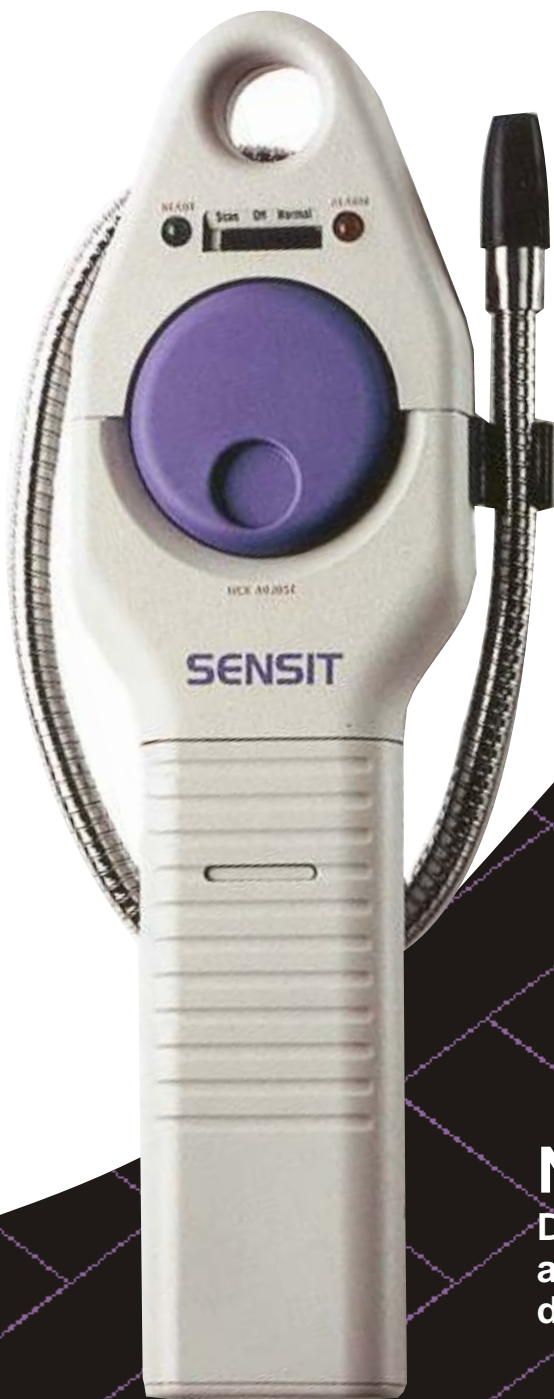

VERSATILE

Automatically detects all existing refrigerants and blends, including 404A.

EASY TO USE

High and low sensitivity settings and one hand operation makes leak detection quick and easy.

NO ADJUSTMENTS

Detects all existing refrigerant with no adjustments necessary to select and detect different refrigerants.

FIND IT! WITH SENSIT[®] RLD-2 REFRIGERANT GAS LEAK DETECTOR



SPECIFICATIONS

PHYSICAL

Size: 3.5" x 10" X 1.6"
(8.9 x 25.4 x 4 cm)
Weight: 1.3 lb. (0.59kg)
Construction: High impact ABS
Battery Power: 3 "C" alkaline batteries
Battery Life: 8 hrs continuous operation
Gooseneck: 16" (40 cm)
Alarms: Audible and flashing LED

SENSOR

Type: Solid State
Sensitivity: Low (normal) 0.5 oz./yr. R22
High (scan) 0.3oz./yr. R22
Response Time: Less than 1 second

Industry Applications

Air Conditioning Systems
Heat Pumps
Commercial Refrigeration Systems/Lines
Refrigerator and Freezer Coils

FEATURES

Long battery life
Long sensor life
Adjustable tick rate system
SENSIT[®] quality and durability

Partial List of Gases Sensed

CFS's, HCFC's, HFC's, SF6, Ethylene Oxide, R-11, R-12, R-22, R-113, R-114, R-123, R-125, R-134a, R-500, R-502



SENSIT TECHNOLOGIES

851 Transport Drive • Valparaiso, IN 46383-8432
Phone: (888) 4SENSIT • (219) 465-2700
Fax: (219) 465-2701 • www.gasleaksensors.com



Represented by _____