

FIND IT! WITH **SENSIT[®] CO** Carbon Monoxide Analyzer

**FAST RESPONSE • OPTIONALLY TEST “AIR FREE” CO
BACKLIT DISPLAY • EASILY PRINT SAVED DATA**



Use the SENSIT[®] CO to conduct carbon monoxide checks in residential and commercial buildings.



The SENSIT[®] CO with its powerful rotary pump, hot air probe and bright LCD display makes it perfect for testing ambient air and flue gas samples. Infrared communication allows printing of test results to a compact printer (accessory) or PC simple and convenient.

FIND IT! WITH SENSIT[®]CO

Carbon Monoxide Analyzer

The **SENSIT[®]CO** is available with an oxygen sensing feature. When so equipped the instrument will simultaneously display CO and O2 readings for thorough flue gas testing. Ask for the **SENSIT[®]CO_{plus}**.

The warranty on the **SENSIT[®]CO** instrument and sensor is for 2 years (excluding calibration and batteries). The **SENSIT[®]CO** comes in a hard carrying case complete with flue probe, 5 feet of flexible tubing, particle filter, batteries and instrument manual.

OPERATIONAL SPECIFICATIONS


Temp: 0 - 104°F (17.7° to 40° C)
 Humidity: 5 - 95% RH (non-condensing)
 Duty Cycle: Auto shut off After 30 minutes
 Detection Range: 0 - 5000ppm CO
 0 - 5000ppm CO "Air Free" (optionally)
 0 - 25% O2 (optionally)
 Resolution: 1ppm
 Response Time: 3 seconds, 90% of reading
 in less than 60 seconds
 Sensor Accuracy: ± 5ppm, ± 5% of reading,
 whichever is greater
 Zero Adjustment: Push button
 Power Source: 3 "C" alkaline batteries

PHYSICAL SPECIFICATIONS

Size: 3" x 10" x 2.4"
 (7.6 x 25.4 x 6cm)
 Weight: 1.1 pounds (0.5kg)
 Battery Life: 20+ hours continuous operation
 Sensor: Long life electrochemical
 Construction: Durable ABS plastic
 Sampling: Rotary Vane Pump
 Printout: Via infrared LED



Sensit[®]CO instruments are Approved UL913,
 For Class 1, Division 1, Groups C and D
 Hazardous locations when used with
 alkaline batteries.

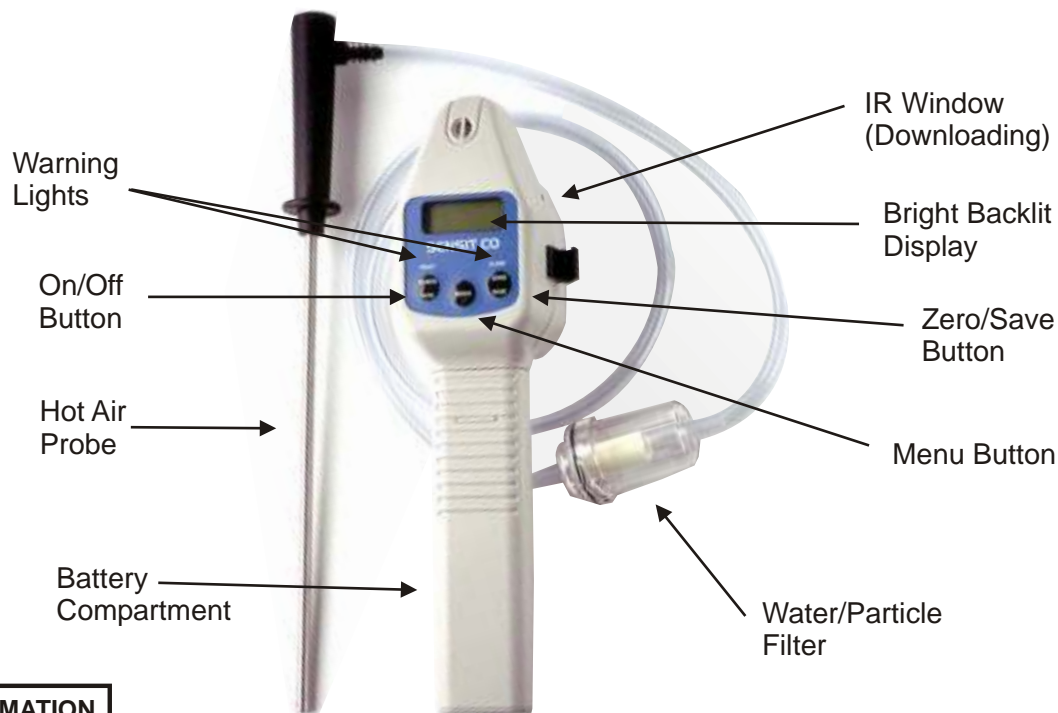

FOR MORE INFORMATION
J And N Enterprises, Inc.
 851 Transport Drive
 Valparaiso, IN 46383-8432
 Phone: (888) 4SENSIT
 (473-6748)
 (219) 465-2700
 Fax: (219) 465-2701
 www.gasleaksensors.com



Distributed by _____